

## MF-7900DRH24 Series

Semi-dry head, Cylinder-bed, Bottom Coverstitch Machine with digital type top feed/For hemming <with left hand fabric trimmer>





# The machine is provided with the digital setting of the top digital type top feed mechanism.

This mechanism prevents problems, such as twist of fabric, uneven material feed, skey of grain and stitch gathering on multi-layered sections of material, which are likely to occur when sewing elastic materials, thereby achieving stable seam quality.

Digital setting of the top feed mechanism can be carried out with jog dial with control panel. (Top feed amount can be adjusted and stored directly in memory.)



## Fabric damages of sewn products are eliminated.

The digital type top feed mechanism smoothly and consistently feeds the material straight, thereby preventing wobbling of the material. In comparison with the differential top and bottom feed mechanism, the top feed mechanism does not leave damages and marks on the material even when a light-weight material is used.

## Reduction in setup time

Digital setting of the top feed mechanism enables easy adjustment of sewing even when the product to be sewn is changed, thereby reducing the setup time.



### Flat and soft seams (H24)

The sewing machine produces seams with no semi-cylindrical swells by performing sewing while making the feeding lengths of the right and left needle threads equal.



#### SPECIFICATIONS


Model name	MF-7912DRH24	MF-7913DRH24
Stitch type	Semi-dry head, 2-needle bottom covering stitch	Semi-dry head, 3-needle bottom covering stitch
Max. sewing speed	5,000 sti/min※	
Feed mechanism	Digital type top feed	
stitch length	0.9mm~3.6mm	
Presser-bar air pressure change-over switch	Push button method	
Needle	UY128GAS #9S~#12S (#10S)	
Lift of the presser foot	5mm~8mm	
Lubricating oil	JUKI Machine Oil 18 (equivalent to ISO VG18)	
Power requirement / Power consumption	Single-phase100V, 200V · 3-phase200V/500VA	

<sup>&</sup>quot;sti/min" stands for "Stitches per Minute."

### WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:

#### Head

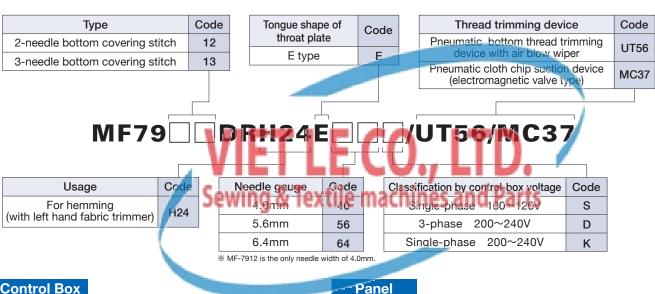

**Control Box** 

**SC921B** 

CP18B

OPTION

HOTLINE: 0982 085 899

Air blow hem guide device: 70005385

JUKI ECO PRODUCTS

The MF-7913DRH24 is an eco-friendly product which complies with JUKI ECO PRODUCTS standards for protecting the environment.



● The sewing machine complies with the "Juki Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive.

For details of JUKI ECO PRODUCTS, refer to: http://www.juki.co.jp/eco\_e/index.html

\*The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment.
The Juki Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment







**SEWING MACHINERY BUSINESS UNIT** 

2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN PHONE: (81) 42-357-2370 FAX: (81) 42-357-2274

http://www.juki.com

 $\*$  Specifications and appearance are subject to change without prior notice for improvement.

\* Read the instruction manual before putting the machine into service to ensure safety.

\* This catalogue prints with environment-friendly soyink on recycle paper.